

# Coaxial Amplifier

## ZHL-42+

50Ω Medium High Power 700 to 4200 MHz

### Features

- wideband, 700 to 4200 MHz
- high IP3, +44 dBm typ.
- high gain, 35 dB min.

### Applications

- communication systems
- cellular
- instrumentation
- laboratory



ZHL-42X+

ZHL-42+

CASE STYLE: U36

Connectors	Model
SMA	ZHL-42+
SMA	ZHL-42X+

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications at 25°C

Parameter	Condition (MHz)	ZHL-42+ ▲ZHL-42X+			Units
		Min.	Typ.	Max.	
Frequency Range		700	—	4200	MHz
Gain	700-4200	35	38	42	dB
Gain Flatness	700-4200	—	±0.8	±1.3	dB
Output Power at 1dB compression	700-4200	+28	+30	—	dBm
Output Power at 3dB compression	700-4200	+29	+31	—	dBm
Noise Figure	700-4200	—	8.5	—	dB
Output third order intercept point	700-4200	—	+44	—	dBm
Input VSWR	700-4200	—	1.5	2.5	:1
Output VSWR	700-4200	—	2.0	2.5	:1
DC Supply Voltage		—	15	—	V
Supply Current		—	—	1.0	A

Open load is not recommended, potentially can cause damage.  
With no load derate max. input power by 20 dB.

▲Heat sink not included. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 65°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 1.3°C/W max.

### Maximum Ratings

Parameter	Ratings
Operating Temperature	-20°C to 65°C
Storage Temperature	-55°C to 100°C
DC Voltage	+20V
Input RF Power (no damage)	+5 dBm


Permanent damage may occur if any of these limits are exceeded.

### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Outline Drawing for models with heatsink

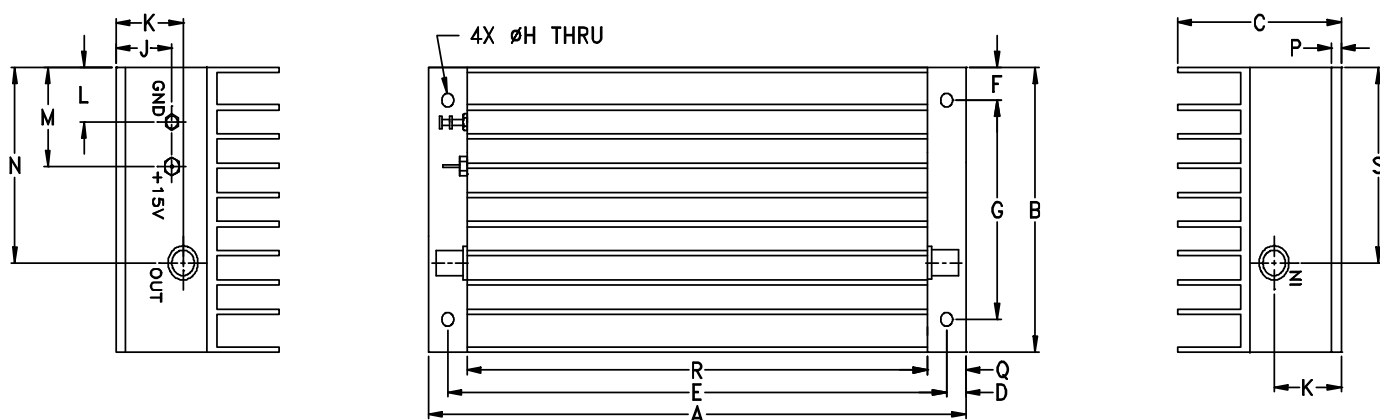

### MOUNTING INFORMATION FOR MODELS WITHOUT HEATSINK

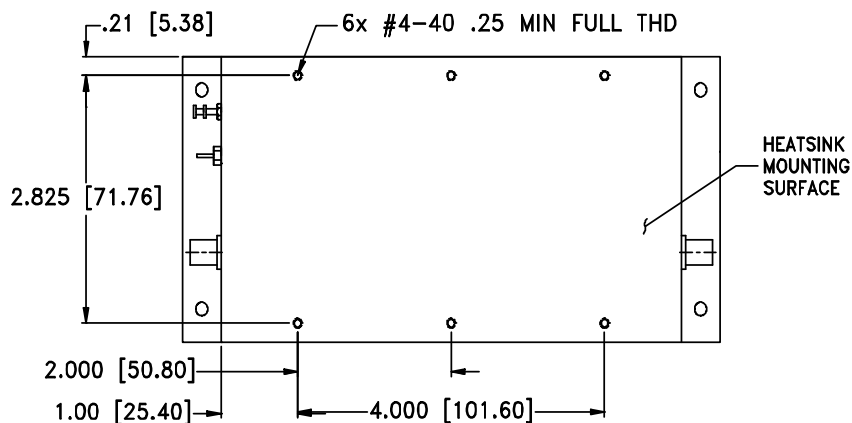

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	wt
7.00	3.25	2.13	.25	6.500	.38	2.500	.156	.73	.88	.63	1.13	2.23	.125	.50	6.00	2.23	grams
177.80	82.55	54.10	6.35	165.10	9.65	63.50	3.96	18.54	22.35	16.00	28.70	56.64	3.18	12.70	152.40	56.64	900







\*600 grams without heatsink

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR (:1)		POUT at 1 dB COMPR. (dBm)	NOISE FIGURE (dB)	IP3 (dBm)
	15V	15V	IN	OUT	15V	15V	15V
700	39.53	67.53	1.47	1.64	31.76	8.08	50.12
800	39.03	53.97	1.38	1.67	31.93	8.02	49.64
900	38.54	63.56	1.35	1.75	32.10	8.13	48.98
1200	38.33	54.93	1.36	2.13	32.07	8.09	48.80
1500	39.00	69.53	1.34	2.15	31.76	8.26	44.93
1800	39.00	58.78	1.29	1.52	31.27	8.29	45.99
2100	39.12	48.57	1.28	1.50	31.97	8.21	47.85
2400	39.46	52.25	1.27	1.73	31.73	8.07	44.85
2700	38.34	62.54	1.30	1.97	31.91	7.90	44.03
3000	38.55	53.70	1.23	2.12	31.73	7.83	47.68
3300	38.27	54.45	1.14	2.21	31.97	8.21	47.88
3600	38.83	52.99	1.16	2.26	32.46	8.23	46.83
3900	38.26	48.96	1.05	1.76	32.01	8.37	47.92
4200	38.18	47.93	1.14	1.64	30.26	8.76	42.62

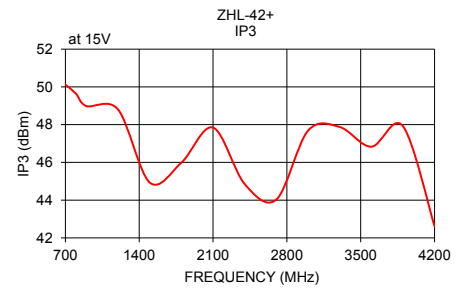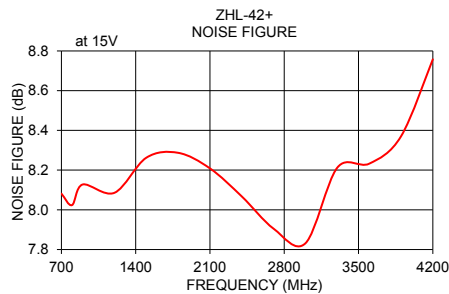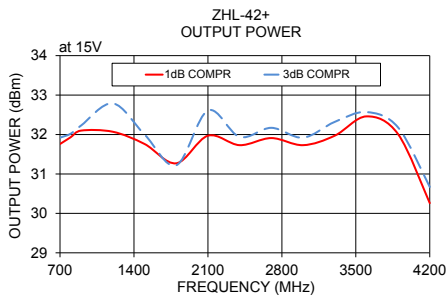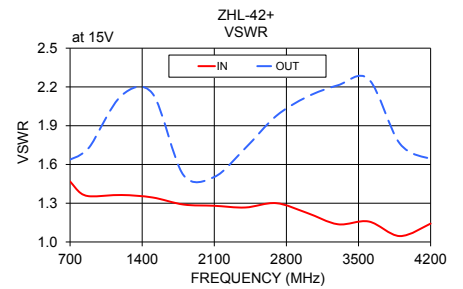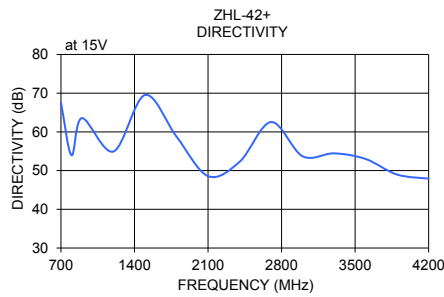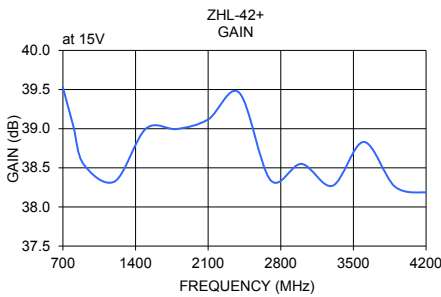

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

